

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/007543 A1

(51) International Patent Classification⁷: **B65G 39/02**

(21) International Application Number:
PCT/IB2004/002308

(22) International Filing Date: 16 July 2004 (16.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-276972 18 July 2003 (18.07.2003) JP

(71) Applicant (for all designated States except US): **TOYOTA JIDOSHA KABUSHIKI KAISHA** [JP/JP]; 1, Toyotacho, Toyoda-shi, Aichi-ken 471-8571 (JP).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **YAMAHARA, Yasushi** [JP/JP]; Room 601, Daitoku Mansion, 8-8 Yamano-te, Toyota 471-0833 (JP). **MOTODA, Masanori**

[JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyotacho, Toyoda-shi, Aichi-ken 471-8571 (JP). **KIMURA, Masashi** [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyotacho, Toyoda-shi, Aichi-ken 471-8571 (JP). **SUGIURA, Masaharu** [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyotacho, Toyoda-shi, Aichi-ken 471-8571 (JP). **ISHII, Akira** [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyotacho, Toyoda-shi, Aichi-ken 471-8571 (JP). **AOKI, Toshitaka** [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, 1, Toyotacho, Toyoda-shi, Aichi-ken 471-8571 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,

[Continued on next page]

(54) Title: **FRICION ROLLER IN CONVEYOR**

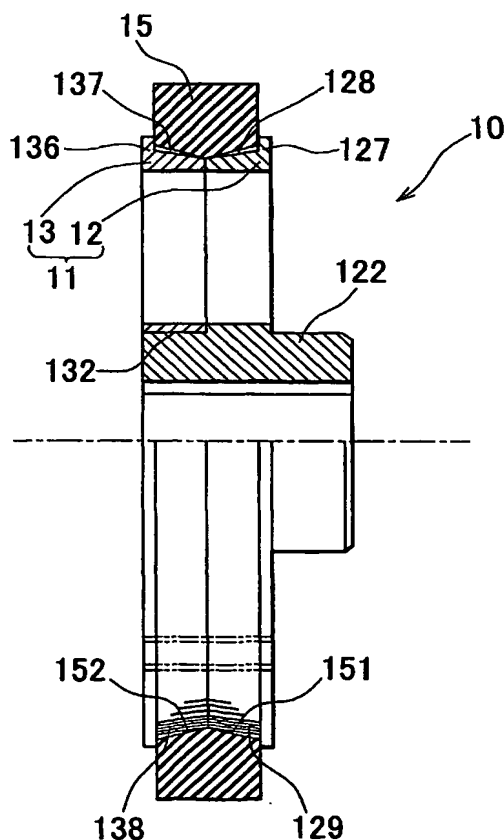

(57) Abstract: A friction roller (10) includes a support roller (11) and an annular elastic ring (15) which it externally fitted to the support roller (11). The support roller (11) is divided into two portions in a thickness direction, that is, a first divided roller (12) and a second divided roller (13). A flange (127) is formed on one side of the first divided roller (12), and a taper face (128) is formed in an outer peripheral face of the first divided roller (12). A knurling portion (129) is formed in the taper face (128). A flange (136) is formed on one side of the second divided roller (13), and a taper face (137) is formed in an outer peripheral face of the second divided roller (13). A knurling portion (138) is formed in the taper face (137). Meanwhile, taper faces (151, 152) expanding outward are formed in an inner peripheral face of the elastic ring (15). The taper faces (151, 152) of the elastic ring (15) are engaged with the taper face (128) of the first divided roller (12) and the taper face (137) of the second divided roller (13).



PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.